



Kuularuuvituki FK

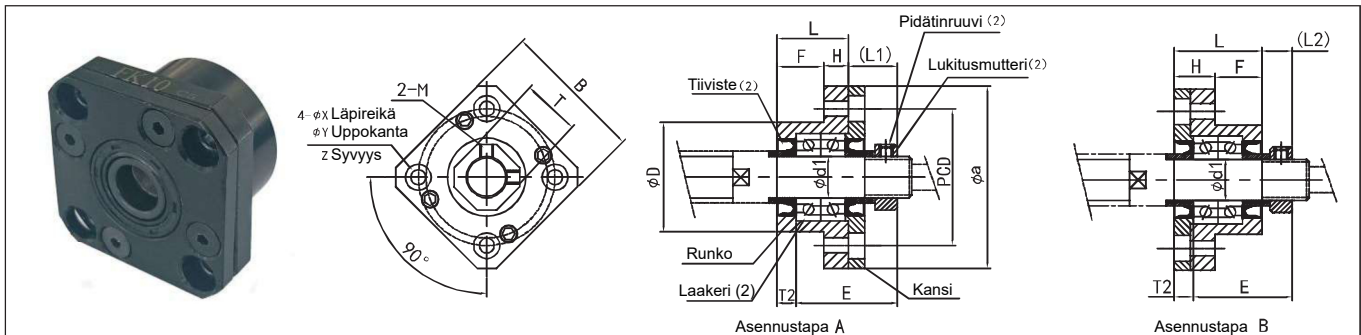

Malli	Kuularuuville:	FK -tukilaakerin malli - ja kokotaulukko																		
		d1	L	H	F	E	Dg6	a	PCD	B	L1	T1	L2	T2	X	Y	Z	M	T	
FK5	6/8	5	16.5	6	10.5	18.5	20	34	26	26	5.5	3.5	7	5	3.4	6.5	4	M3	11	○
FK6	6/8/10	6	20	7	13	22	22	36	28	28	5.5	3.5	8.5	6.5	3.4	6.5	4	M3	12	○
FK8	8/10/12	8	23	9	14	26	28	43	35	35	7	4	10	7	3.4	6.5	4	M3	14	○
FK10	12/14/15	10	27	10	17	29.5	34	52	42	42	7.5	5	8.5	6	4.5	8	4	M3	16	○
FK12	14/15/16	12	27	10	17	29.5	36	54	44	44	7.5	5	8.5	6	4.5	8	4	M4	19	○
FK15	18/20	15	32	15	17	36	40	63	50	52	10	6	12	8	5.5	9.5	6	M4	22	○
FK17	20/25	17	45	22	23	47	50	77	62	64	11	9	14	12	6.6	11	9	M4	24	○
FK20	25/28	20	52	22	30	50	57	85	70	68	8	10	12	14	6.6	11	9	M4	30	○
FK25	32/36	25	57	27	30	60	63	98	80	79	13	10	20	17	9	15	13	M5	35	○
FK30	36/40	30	62	30	32	61	75	117	95	93	11	12	17	18	11	18	15	M6	40	○

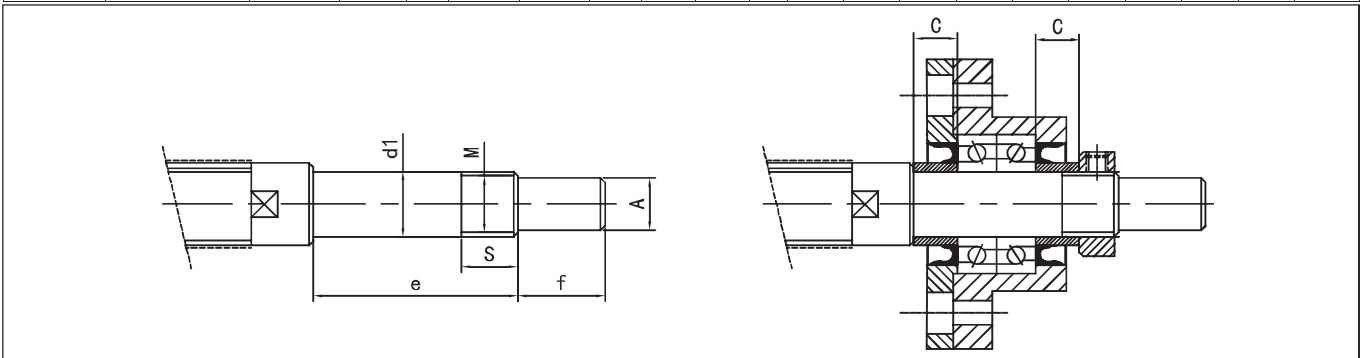

Kuularuuvin pään koneistusmitat							
d1	A	e	f	M	S	Holkin pituus C	
5 ^{-0.008} _{-0.015}	4	25	6	M5X0.5	7	3.5	○
6 ^{-0.008} _{-0.015}	4	28	8	M6X0.75	8	5	○
8 ^{-0.008} _{-0.015}	6	32	9	M8X1	10	5.5	○
10 ^{-0.008} _{-0.015}	8	36	15	M10X1	11	5.5	○
12 ^{-0.008} _{-0.015}	10	36	15	M12X1	11	5.5	○
15 ^{-0.008} _{-0.017}	12	47	20	M15X1	13	10	○
17 ^{-0.008} _{-0.017}	15	58	23	M17X1	15	10	○
20 ^{-0.008} _{-0.017}	17	62	25	M20X1	17	11	○
25 ^{-0.008} _{-0.017}	20	76	30	M25X1.5	20	15	○
30 ^{-0.008} _{-0.018}	25	72	38	M30X1.5	25	9	○