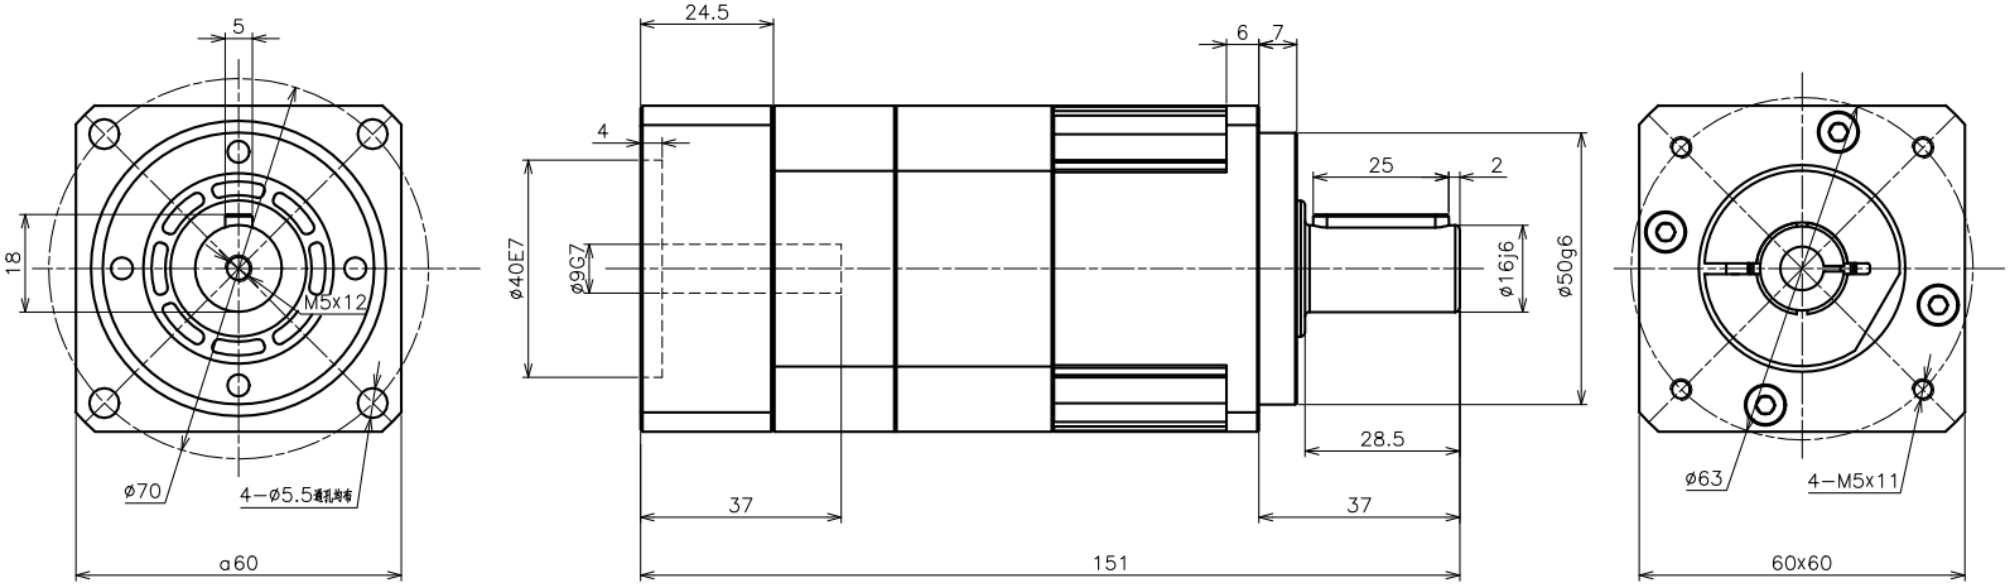


投影方向

Reducer performance parameters			
Ratio	20:1	Protection class	IP65
Rated life-span	20000h	Moment of inertia	0.03Kgcm^2
Rated torque	50N·m	Backlash	≤7arcmin
Emergency stop	100N·m	Noise	≤58dB(1m)
Max radial force	1530N	Input speed	3000rpm
Max axial force	630N	Working temperature	−10°C~+90°C

GREENLAB

6.0047 HAB60
Planetary gear

HAB60-20-P2S2OP2-9x37-40-63M5