


SFS -Kuularuuvit

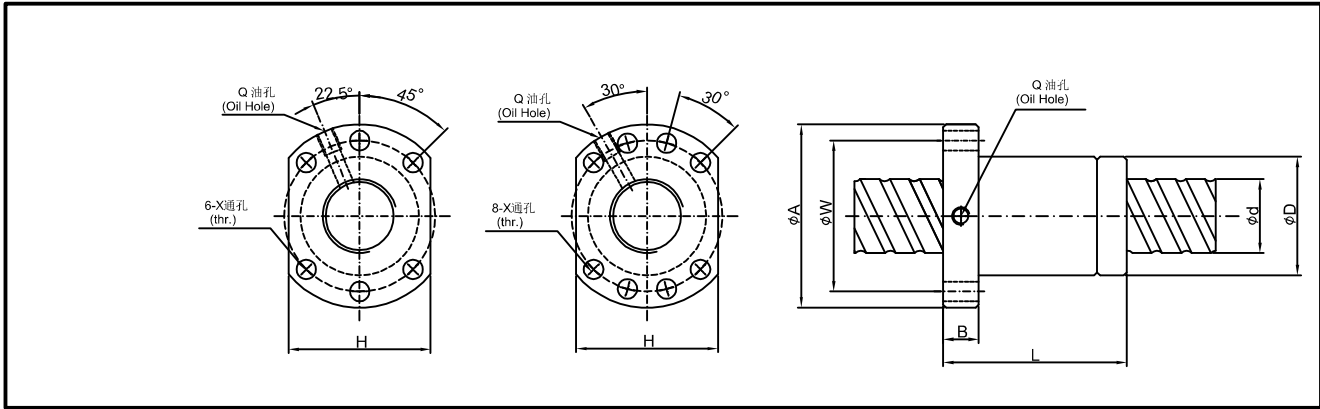

Bearing number	Dimensions mm															STOCK
	d	l	Da	D	A	B	L	W	X	H	Q	n	Ca	Coa	k	
SFS1205-2.8	12	5	2.5	24	40	10	31	32	4.5	30		2.8X1	661	1316	19	✓
SFS1210-2.8	12	10	2.5	24	40	10	48.5	32	4.5	30		2.8X1	642	1287	19	✓
SFS1605-3.8	15	5	2.778	28	48	10	38	38	5.5	40	M6	3.8X1	1112	2507	30	✓
SFS1610-2.8	15	10	2.778	28	48	10	47	38	5.5	40	M6	2.8X1	839	1821	23	✓
SFS1616-1.8	15	16	2.778	28	48	10	45	38	5.5	40	M6	1.8X1	552	1137	14	✓
SFS1616-2.8	15	16	2.778	28	48	10	61	38	5.5	40	M6	2.8X1	808	1769	22	○
SFS1620-1.8	15	20	2.778	28	48	10	57	38	5.5	40	M6	1.8X1	554	1170	14	✓
SFS2005-3.8	20	5	3.175	36	58	10	40	47	6.6	44	M6	3.8X1	1484	3681	37	✓
SFS2010-3.8	20	10	3.175	36	58	10	60	47	6.6	44	M6	3.8X1	1516	3833	40	✓
SFS2020-1.8	20	20	3.175	36	58	10	57	47	6.6	44	M6	1.8X1	764	1758	19	✓
SFS2020-2.8	20	20	3.175	36	58	10	77	47	6.6	44	M6	2.8X1	1118	2734	29	○
SFS2505-3.8	25	5	3.175	40	62	12	40	51	6.6	48	M6	3.8X1	1650	4658	43	✓
SFS2510-3.8	25	10	3.175	40	62	12	62	51	6.6	48	M6	3.8X1	1638	4633	45	✓
SFS2525-1.8	25	25	3.175	40	62	12	70	51	6.6	48	M6	1.8X1	843	2199	22	✓
SFS2525-2.8	25	25	3.175	40	62	12	95	51	6.6	48	M6	2.8X1	1232	3421	34	○
SFS3205-3.8	32	5	3.175	50	80	12	42	65	9	62	M6	3.8X1	1839	6026	51	○
SFS3210-3.8	31	10	3.969	50	80	13	62	65	9	62	M6	3.8X1	2460	7255	55	✓
SFS3220-2.8	31	20	3.969	50	80	12	80	65	9	62	M6	2.8X1	1907	5482	43	✓
SFS3232-1.8	31	32	3.969	50	80	13	84	65	9	62	M6	1.8X1	1257	3426	27	✓
SFS3232-2.8	31	32	3.969	50	80	13	116	65	9	62	M6	2.8X1	1838	5329	42	○
SFS4005-3.8	40	5	3.175	63	93	15	45	78	9	70	M8	3.8X1	2018	7589	60	✓
SFS4010-3.8	38	10	6.35	63	93	14	63	78	9	70	M8	3.8X1	5035	13943	67	✓
SFS4020-2.8	38	20	6.35	63	93	14	82	78	9	70	M8	2.8X1	3959	10715	54	✓
SFS4040-1.8	38	40	6.35	63	93	15	105	78	9	70	M8	1.8X1	2585	6648	34	✓
SFS4040-2.8	38	40	6.35	63	93	15	145	78	9	70	M8	2.8X1	3780	10341	52	○
SFS5005-3.8	50	5	3.175	75	110	15	45	93	11	85	M8	3.8X1	2207	9542	68	○
SFS5010-3.8	48	10	6.35	75	110	18	68	93	11	85	M8	3.8X1	5638	17852	79	○
SFS5020-3.8	48	20	6.35	75	110	18	108	93	11	85	M8	3.8X1	5749	18485	87	○
SFS5050-1.8	48	50	6.35	75	110	18	125	93	11	85	M8	1.8X1	2946	8749	42	○
SFS5050-2.8	48	50	6.35	75	110	18	175	93	11	85	M8	2.8X1	4308	13610	65	○

l: Lead Da: Ball Dia n: Number or circuits K: stiffness(kgf/μ m)
 Ca: Basic Dynamic Rating Load (kgf) Coa: Basic Static Rating Load (kgf)